

Interply

(Opaque, Smooth Polypropylene Film—Matte or Gloss Finish)


Interply is an opaque polypropylene film engineered to meet the most demanding cosmetic standards. Interply has superior dimensional stability and excellent lay-flat characteristics, which allow the film to feed quickly and reliably through sealing machinery, sheeters, and printing presses. It is an exceptional material for use in the construction of office supply products.

Applications:

- Flexible Packaging
- Printing / graphics applications
- Labels
- L-pockets
- Flat files
- Gusseted files
- Cold lamination film

Advantages:

- Available in matte or gloss finish
- Smooth surface
- Easy to print using a variety of methods including screen printing, offset lithography, and flexography
- Good dimensional stability and lay-flat characteristics
- Easy to coat with adhesives
- Copy safe - will not lift print
- Acid free - contains no PVC
- Easy to weld using either ultrasonic or thermal welding machinery
- Excellent chemical resistance
- Natural living hinge ability
- Economically priced
- Good dimensional stability
- Excellent chemical resistance
- Recyclable

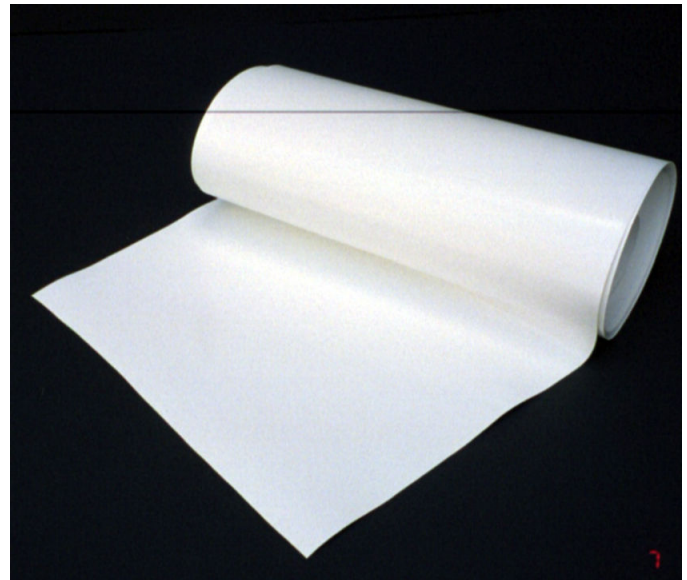

Specifications:

- Smooth, opaque polypropylene film
- White film is standard. Custom colors are available upon request.
- Thickness range: 2 mil to 5.5 mil thick
- Standard web widths:
 - * 69" to 75" wide web
 - * 83" to 93" wide web

Property:	ASTM Test:	Units:	Value:
1% Secant Modulus (CD)	D-882	1000 psi	221
Tensile Strength (CD)	D-882	psi	6438
Elongation (CD)	D-882	%	878

*The statements, technical information, and recommendations contained herein are presented in good faith based upon tests believed to be reliable and/or practical experience. The reader is cautioned that Profol cannot guarantee the accuracy or completeness of the information, and it is the customer's sole responsibility to determine the suitability of Profol's products in any given application.

American
profol®
Inc.
A Profol Group Company

American Profol, Inc.
4333 C-St. SW
Cedar Rapids IA 52404
Phone: 319-365-0599
Fax: 319-365-1696
<http://www.profol.com>

Profol Kunststoffe GmbH
Profolstrasse 1-10
D-83128 Halfing
Germany
Phone: +(49) 08055-181-0
Fax: +(49) 08055-799

Innofol GmbH
Geraer Str. 3
D-07973 Greiz-Gommla
Germany
Phone: +(40) 03661-7082-0
Fax: +(49) 03661-7082-10