

Tougher SuperClear

(Optically Clear, Co-Extruded Cast Polypropylene Packaging Film)

Tougher SuperClear film has an exceptional tear resistance for packaging applications requiring durability. It provides excellent printability and seal strength needed for your unique packaging solution.

Applications:

- Bags and pouches for heavier products

Advantages:


- Optical clarity
- High gloss
- Excellent seal strength
- Exceptional tear resistance
- Low coefficient of friction for easy feeding on high speed packaging equipment
- FDA compliant grades available
- Easy to print and laminate
- Improved tear strength of SuperClear

Specifications:

- Optically clear cast polypropylene film
- Available corona treated on one or both sides
- Thickness range: 1.2 mil to 5.5 mil thick
- Web widths up to 77" wide
(Material can be slit in-line to custom roll widths)
- Clear film is standard. Custom colors are available upon request

Typical Properties (2 mil thick film):

Property:	ASTM Test:	Units:	Value:
1% Secant Modulus (CD)	D-882	1000 psi	193
Tensile Strength (CD)	D-882	psi	3255
Elongation (CD)	D-882	%	655
Haze	D1003	%	4.1
Elmendorf Tear (CD)	D1922	gF	477

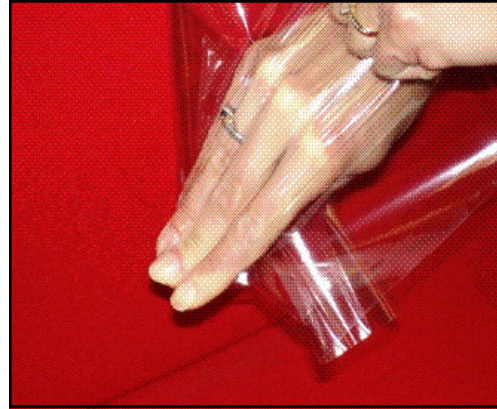

*The statements, technical information, and recommendations contained herein are presented in good faith based upon tests believed to be reliable and/or practical experience. The reader is cautioned that Profol cannot guarantee the accuracy or completeness of the information, and it is the customer's sole responsibility to determine the suitability of Profol's products in any given application.

American
profol®
Inc.
A Profol Group Company

American Profol, Inc.
4333 C-St. SW
Cedar Rapids IA 52404
Phone: 319-365-0599
Fax: 319-365-1696
<http://www.profol.com>

Profol Kunststoffe GmbH
Profolstrasse 1-10
D-83128 Halfing
Germany
Phone: +(49) 08055-181-0
Fax: +(49) 08055-799

Innofol GmbH
Geraer Str. 3
D-07973 Greiz-Gommla
Germany
Phone: +(40) 03661-7082-0
Fax: +(49) 03661-7082-10