
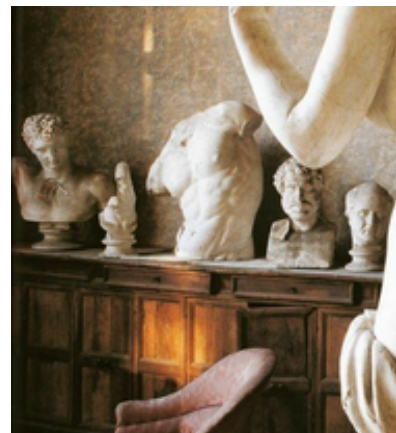


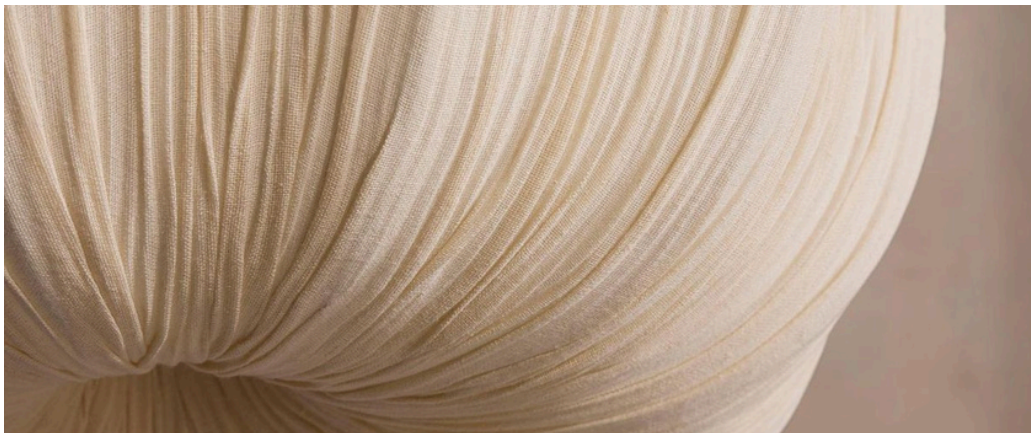

## PAPER LANTERN SM

SSI'S PAPER LANTERN SUPER MATTE IS A UBIQUITOUS CANVAS-LIKE WHITE SHADE THAT EMBODIES OUR DESIRE FOR WHITES THAT ARE.....WELL.....NOT REALLY WHITE. IT IS WARMER, MORE CALMING AND LESS CHALLENGING THAN THE DAZZLING SUNLIGHT REFLECTING ARCHITECTURAL WHITES AND ITS' SOFTER AMBIANCE OFFERS A CLASSIC BACKDROP THAT BEAUTIFULLY SUPPORTS THE TEXTURES, ELEMENTS AND PERSONAL TOUCHES THAT TRANSFORM A SPACE INTO A HOME. PAPER LANTERN APPEALS TO DESIGN SCHEMES THAT CREATE A RESTORATION VIBE - COMFORTABLE AND RELAXING - WHILE CREATING A FLATTERING BACKDROP FOR OUR ARTISANAL TREASURES AND UNIQUE COLLECTIONS.

THE PAPER LANTERN SUPER MATTE FINISH HAS THE LOOK AND FEEL OF A HIGH QUALITY PAINTED FINISH WITH A SUPERIOR SURFACE PERFORMANCE - FASHIONABLE AND FUNCTIONAL. IT IS EASY TO CLEAN, WILL NOT CHIP OR FRACTURE WITH LONG-TERM UV COLOR STABILITY.

**COMPLEMENTARY MATERIALS**

[CLICK HERE](#)

**PRODECOR® 2D PP FILMS**

**COLOR CODE: 15/9002**

**PARALLEL X** 





# PAPER LANTERN SM

PRODECOR® 2D PP FILMS

STOCK RANGE ✓

PARALLEL ✗

COLOR CODE: 15/9002 EMBOSSING: MODERN WOODPORE

## PERFORMANCE SUMMARY

- BLEACH SOLUTION CLEANABLE
- EXCELLENT SOIL & STAIN RESISTANCE
- NATURAL FLUID BARRIER
- EXCELLENT ABRASION & IMPACT RESISTANCE
- EXCELLENT COLOR STABILITY

## ENVIRONMENTAL

- NO ADDED FLAME RETARDANTS
- NO ADDED ANTIMICROBIALS
- DOES NOT CONTAIN FORMALDEHYDE
- FORMULATED WITHOUT PHTHALATES

## CLEANING AND MAINTENANCE

• WATER AND MILD LIQUID SOAP CLEANABLE

## ITEM SPECIFICATIONS

BRAND NAME: PRODECOR

CONTENT: POLYPROPYLENE

MOQ: NONE

SURFACE TEXTURE / EMBOSSING: MODERN WOODPORE

SURFACE GLOSS: 3

SURFACE FINISH LACQUER:

SCRATCH & STAIN RESISTANT EXCIMER TOPCOAT

GAUGE: 150MY (".006") WIDTH: 1,300MM (51.18")

ROLL SIZE: 500LM

DESIGN REPEAT (RAPPORT): 1260MM (49.6")

SUITABLE FOR: FLAT LAMINATION, PROFILE WRAPPING

## PERFORMANCE CHARACTERISTICS

TESTING DONE IN ACCORDANCE TO: ISO 4586-1 2018-07  
150MY SOLID AND 150MY PRINTED EXCIMER TOP COATED  
PRODECOR TESTED

#11 RESISTANCE TO SURFACE WEAR

SOLIDS (150MY): 1550

PRINTS (150MY): 150

#25 RESISTANCE TO IMPACT BY LARGE DIAMETER BALL:  
1600MM (62.99")

#29 RESISTANCE TO SCRATCHING: RATING 3

#31 RESISTANCE TO STAINING (METHOD B)

CLEANABILITY SCORE: 16

\*MUSTARD SEVERE EFFECT \*IODINE MODERATE EFFECT

#33 LIGHT FASTNESS (XENON ARC) (METHOD B)  
(5) NO EFFECT (SOLID OR PRINT)

#41 RESISTANCE TO WET HEAT (100° C)  
(5) NO VISABLE CHANGE

ASTM E84: CLASS A

REDUCED ENVIRONMENTAL IMPACT

R.E.A.C.H. COMPLIANT

MANUFACTURED WITHOUT PLASTICIZERS OR HEAVY  
METALS FIRE CLASSIFICATION EN 13501-1 - CFI - S1

## COMPLEMENTARY MATERIALS

[CLICK HERE](#)