



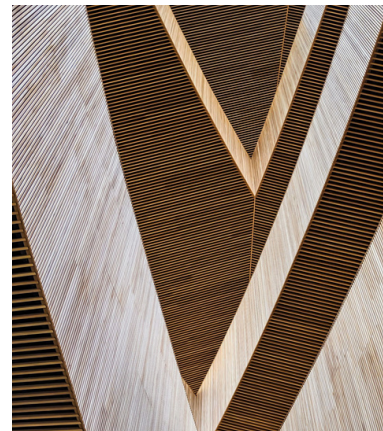

COMPLEMENTARY MATERIALS

[CLICK HERE](#)

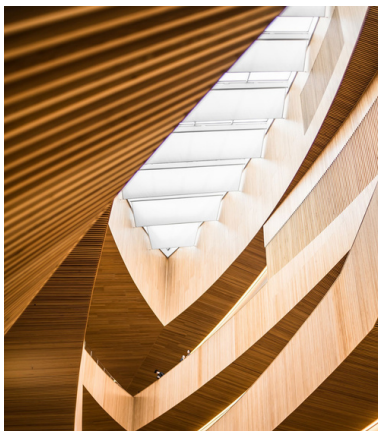

SHEER BEAUTY

SHEER BEAUTY IS A NATURAL BLONDE WOODGRAIN DESIGN IN THE STYLE OF RIFT CUT OAK. IT HAS A FINE LINEAR GRAIN DETAIL, AND PERFECTLY FITS THE DESIRE FOR A CLEAN, CRISP, FRESH WOOD TONE THAT ACTS AS A MODERN SUBTLE NEUTRAL, ALLOWING BOLDER COLORS TO SHINE. ALSO CONSIDER USING SHEER BEAUTY ALONE AS THE STAR ATTRACTION.

SHEER BEAUTY IS OFFERED IN A FURNITURE LIKE TEXTURED FINISH AND IS SUITABLE FOR BOTH VERTICAL AND HORIZONTAL APPLICATIONS. IT IS EASY TO CLEAN, WATER RESISTANT, DOESN'T CHIP, IS HIGHLY DURABLE AND OFFERS LONG TERM UV STABILITY.

PRODECOR® 2D PP FILM
COLOR CODE: PP/5901
PARALLEL





SHEER BEAUTY

PRODECOR® 2D PP FILM

STOCK RANGE ✓ PARALLEL ✓

COLOR CODE: PP/5901 EMBOSSING: MODERN WOODPORE

PERFORMANCE SUMMARY

- BLEACH SOLUTION CLEANABLE
- EXCELLENT SOIL & STAIN RESISTANCE
- NATURAL FLUID BARRIER
- EXCELLENT ABRASION & IMPACT RESISTANCE
- EXCELLENT COLOR STABILITY

ENVIRONMENTAL

- NO ADDED FLAME RETARDANTS
- NO ADDED ANTIMICROBIALS
- DOES NOT CONTAIN FORMALDEHYDE
- FORMULATED WITHOUT PHTHALATES

CLEANING AND MAINTENANCE

• WATER AND MILD LIQUID SOAP CLEANABLE

ITEM SPECIFICATIONS

BRAND NAME: PRODECOR

CONTENT: POLYPROPYLENE

MOQ: NONE

SURFACE TEXTURE / EMBOSSING: MODERN WOODPORE

SURFACE GLOSS: 3

SURFACE FINISH LACQUER:

SCRATCH & STAIN RESISTANT EXCIMER TOPCOAT

GAUGE: 150MY (".006") WIDTH: 1,300MM (51.18")

ROLL SIZE: 500LM

DESIGN REPEAT (RAPPORT): 1260MM (49.6")

SUITABLE FOR: FLAT LAMINATION, PROFILE WRAPPING

PERFORMANCE CHARACTERISTICS

TESTING DONE IN ACCORDANCE TO: ISO 4586-1 2018-07
150MY SOLID AND 150MY PRINTED EXCIMER TOP COATED
PRODECOR TESTED

#11 RESISTANCE TO SURFACE WEAR

SOLIDS (150MY): 1550

PRINTS (150MY): 150

#25 RESISTANCE TO IMPACT BY LARGE DIAMETER BALL:

1600MM (62.99")

#29 RESISTANCE TO SCRATCHING: RATING 3

#31 RESISTANCE TO STAINING (METHOD B)

CLEANABILITY SCORE: 16

*MUSTARD SEVERE EFFECT *IODINE MODERATE EFFECT

#33 LIGHT FASTNESS (XENON ARC) (METHOD B)

(5) NO EFFECT (SOLID OR PRINT)

#41 RESISTANCE TO WET HEAT (100° C)

(5) NO VISABLE CHANGE

ASTM E84: CLASS A

REDUCED ENVIRONMENTAL IMPACT

R.E.A.C.H. COMPLIANT

MANUFACTURED WITHOUT PLASTICIZERS OR HEAVY

METALS FIRE CLASSIFICATION EN 13501-1 - CFI - S1

COMPLEMENTARY MATERIALS

[CLICK HERE](#)