




COMPLEMENTARY MATERIALS

[CLICK HERE](#)



CARMEL WALNUT

CARMEL WALNUT EXUDES WARM SOPHISTICATION ROOTED IN CALIFORNIA'S GOLDEN COAST. THIS WOODGRAIN COLORATION DRAWS INSPIRATION FROM THE SUN-DRENCHED SHORES AND ROLLING HILLS OF CARMEL-BY-THE-SEA — WHERE RICH WALNUT TIMBER MEETS SOFT MEDITERRANEAN LIGHT AND GENTLE SEA BREEZES. DEEP CHOCOLATE BROWN HEARTWOOD TONES BLEND SEAMLESSLY WITH WARM CARAMEL HIGHLIGHTS, HONEYED AMBERS, AND OCCASIONAL DARKER STREAKS, EVOKING THE RICH, INVITING PALETTE OF AGED WALNUT BATHED IN GOLDEN-HOUR SUNLIGHT. THIS ELEGANT DESIGN CAPTURES THE LUXURIOUS DEPTH OF WALNUT WITH FLOWING, STRAIGHT-TO-WAVY GRAIN PATTERNS THAT REVEAL NATURAL CHARACTER AND SUBTLE FIGURE.

CARMEL WALNUT IS OFFERED IN A FURNITURE LIKE TEXTURED FINISH AND IS SUITABLE FOR VERTICAL AND HORIZONTAL APPLICATIONS. IT IS EASY TO CLEAN, DOESN'T CHIP, IS HIGHLY DURABLE AND HAS LONG TERM UV STABILITY.

PRODECOR® 2D PP FILM

COLOR CODE: SSI/021

PARALLEL ✓





CARMEL WALNUT

PRODECOR® 2D PP FILM

STOCK RANGE ✓ PARALLEL ✓

COLOR CODE: SSI/021. EMBOSSING: MODERN WOODPORE

PERFORMANCE SUMMARY

- BLEACH SOLUTION CLEANABLE
- EXCELLENT SOIL & STAIN RESISTANCE
- NATURAL FLUID BARRIER
- EXCELLENT ABRASION & IMPACT RESISTANCE
- EXCELLENT COLOR STABILITY

ENVIRONMENTAL

- NO ADDED FLAME RETARDANTS
- NO ADDED ANTIMICROBIALS
- DOES NOT CONTAIN FORMALDEHYDE
- FORMULATED WITHOUT PHTHALATES

CLEANING AND MAINTENANCE

• WATER AND MILD LIQUID SOAP CLEANABLE

ITEM SPECIFICATIONS

BRAND NAME: PRODECOR

CONTENT: POLYPROPYLENE

MOQ: NONE

SURFACE TEXTURE / EMBOSSING: MODERN WOODPORE

SURFACE GLOSS: 3

SURFACE FINISH LACQUER:

SCRATCH & STAIN RESISTANT EXCIMER TOPCOAT

GAUGE: 150MY (".006") WIDTH: 1,300MM (51.18")

ROLL SIZE: 500LM

DESIGN REPEAT (RAPPORT): 1260MM (49.6")

SUITABLE FOR: FLAT LAMINATION, PROFILE WRAPPING

PERFORMANCE CHARACTERISTICS

TESTING DONE IN ACCORDANCE TO: ISO 4586-1 2018-07
150MY SOLID AND 150MY PRINTED EXCIMER TOP COATED
PRODECOR TESTED

#11 RESISTANCE TO SURFACE WEAR

SOLIDS (150MY): 1550

PRINTS (150MY): 150

#25 RESISTANCE TO IMPACT BY LARGE DIAMETER BALL:

1600MM (62.99")

#29 RESISTANCE TO SCRATCHING: RATING 3

#31 RESISTANCE TO STAINING (METHOD B)

CLEANABILITY SCORE: 16

*MUSTARD SEVERE EFFECT *IODINE MODERATE EFFECT

#33 LIGHT FASTNESS (XENON ARC) (METHOD B)

(5) NO EFFECT (SOLID OR PRINT)

#41 RESISTANCE TO WET HEAT (100° C)

(5) NO VISABLE CHANGE


ASTM E84: CLASS A

REDUCED ENVIRONMENTAL IMPACT

R.E.A.C.H. COMPLIANT

MANUFACTURED WITHOUT PLASTICIZERS OR HEAVY

METALS FIRE CLASSIFICATION EN 13501-1 - CFI - S1

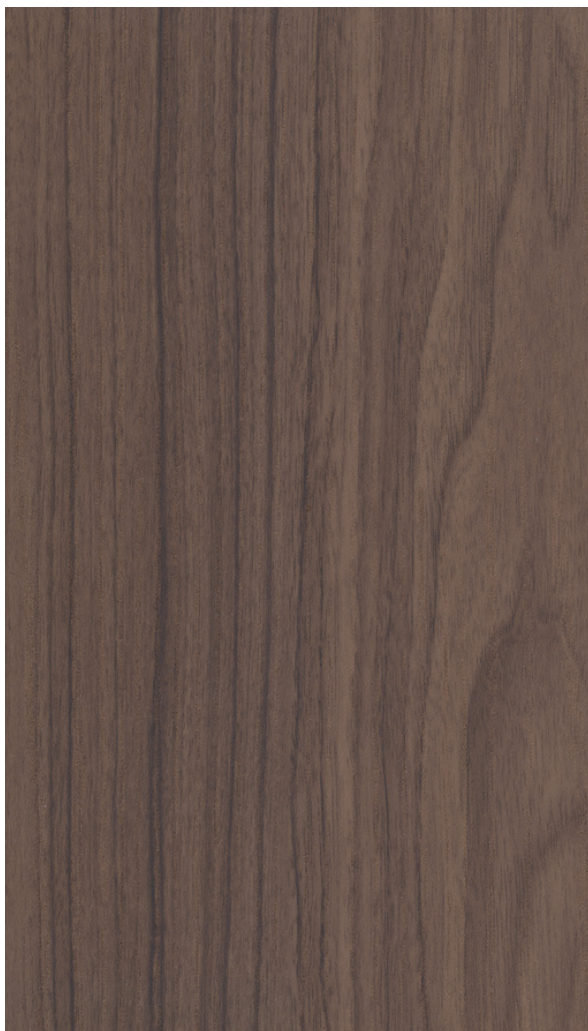

COMPLEMENTARY MATERIALS

[CLICK HERE](#)

