


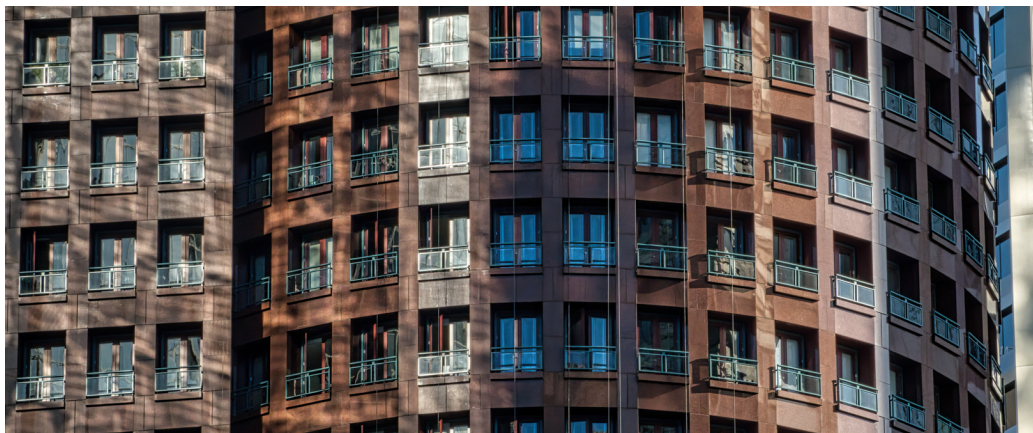

COMPLEMENTARY MATERIALS

[CLICK HERE](#)

TRUFFLE BROWN SM

SSI'S TRUFFLE BROWN SUPER MATTE IS A RICH NEUTRAL, WITH A RESTORATIVE DARK HUE WHICH IS VERSATILE AND ELEGANT. IT IS AN EARTHY DEEP BROWN WITH AN OXIDIZED GREY PATINA UNDERTONE INFUSING SPACES WITH DRAMA AND INTIMACY. AS WELL AS SECURITY AND SOPHISTICATION. IT'S CALMING ALMOST ZEN LIKE QUALITY PROMOTES A CONNECTION TO THE PRESENT, OFFERING A MEDITATIVE AND MINDFULNESS FEEL...ENHANCING ITS PLACE IN THE WELL BUILDING MEGA TREND. BOTH MODERN AND TIMELESS IT FEELS AT ONCE BOTANICAL AND HERITAGE, EQUALLY COMPLEMENTING THE POPULAR WHITE RIFT OAKS AND DEEP WALNUT WOODGRAINS.

THE TRUFFLE BROWN SUPER MATTE FINISH HAS THE LOOK AND FEEL OF A HIGH QUALITY PAINTED FINISH WITH A SUPERIOR SURFACE PERFORMANCE – FASHIONABLE AND FUNCTIONAL. IT IS EASY TO CLEAN, WILL NOT CHIP OR FRACTURE WITH LONG-TERM UV COLOR STABILITY.

PRODECOR® 2D PP FILMS

COLOR CODE: 85/3007

PARALLEL  





TRUFFLE BROWN SM

PRODECOR® 2D PP FILMS

STOCK RANGE ✓

PARALLEL ✗

COLOR CODE: 85/3007 EMBOSSING: MODERN WOODPORE

PERFORMANCE SUMMARY

- BLEACH SOLUTION CLEANABLE
- EXCELLENT SOIL & STAIN RESISTANCE
- NATURAL FLUID BARRIER
- EXCELLENT ABRASION & IMPACT RESISTANCE
- EXCELLENT COLOR STABILITY

ENVIRONMENTAL

- NO ADDED FLAME RETARDANTS
- NO ADDED ANTIMICROBIALS
- DOES NOT CONTAIN FORMALDEHYDE
- FORMULATED WITHOUT PHTHALATES

CLEANING AND MAINTENANCE

• WATER AND MILD LIQUID SOAP CLEANABLE

ITEM SPECIFICATIONS

BRAND NAME: PRODECOR

CONTENT: POLYPROPYLENE

MOQ: NONE

SURFACE TEXTURE / EMBOSSING: MODERN WOODPORE

SURFACE GLOSS: 3

SURFACE FINISH LACQUER:

SCRATCH & STAIN RESISTANT EXCIMER TOPCOAT

GAUGE: 150MY (".006") WIDTH: 1,300MM (51.18")

ROLL SIZE: 500LM

DESIGN REPEAT (RAPPORT): 1260MM (49.6")

SUITABLE FOR: FLAT LAMINATION, PROFILE WRAPPING

PERFORMANCE CHARACTERISTICS

TESTING DONE IN ACCORDANCE TO: ISO 4586-1 2018-07
150MY SOLID AND 150MY PRINTED EXCIMER TOP COATED
PRODECOR TESTED

#11 RESISTANCE TO SURFACE WEAR

SOLIDS (150MY): 1550

PRINTS (150MY): 150

#25 RESISTANCE TO IMPACT BY LARGE DIAMETER BALL:
1600MM (62.99")

#29 RESISTANCE TO SCRATCHING: RATING 3

#31 RESISTANCE TO STAINING (METHOD B)

CLEANABILITY SCORE: 16

*MUSTARD SEVERE EFFECT *IODINE MODERATE EFFECT

#33 LIGHT FASTNESS (XENON ARC) (METHOD B)
(5) NO EFFECT (SOLID OR PRINT)

#41 RESISTANCE TO WET HEAT (100° C)
(5) NO VISABLE CHANGE

ASTM E84: CLASS A

REDUCED ENVIRONMENTAL IMPACT

R.E.A.C.H. COMPLIANT

MANUFACTURED WITHOUT PLASTICIZERS OR HEAVY
METALS FIRE CLASSIFICATION EN 13501-1 - CFI - S1

COMPLEMENTARY MATERIALS

[CLICK HERE](#)